


- Straddle legs width reach 1300mm(500kg)and1250mm(1000kgs).
- Lifting Height from 1500-1600mm.
- With adjustable forged forks.
- High quality steel mast ensures rigidity and durability.
- High efficient pumps makes the control easier to operate.
- Foot and hand controlled lifting function allows the operator to work without having to perform extreme body movements.
- Metal grid protects user from lift chains.
- With safety wheel guard and brake system to ensure safety during operation.

Model:
SDJAS500
SDJAS1000

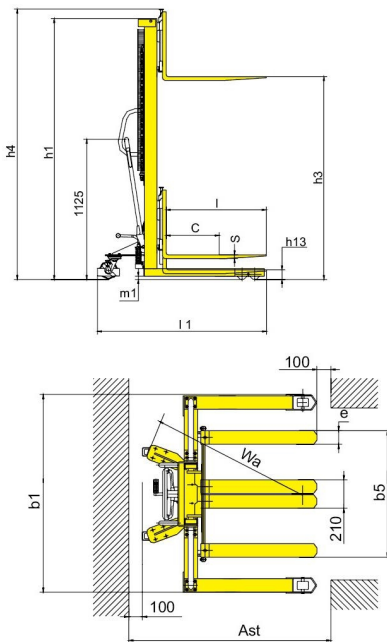

SDJAS series with Straddle legs and adjustable forks

1KG=2.205LB 1INCH=25.40MM

Model		SDJAS500	SDJAS1000
Load capacity/rated load	Q(kg)	500	1000
Load centre distance	c(mm)	500	500
Fork height, lowered	h_{13} (mm)	70	70
Height, mast lowered	h_1 (mm)	2000	2050
Max. lift height	h_2(mm)	1600	1600
Height, mast extended	h_4 (mm)	2100	2155
Overall length	l_1 (mm)	1340/1600	1300/1560
Overall width	b_1 (mm)	1525	1475
Fork dimensions	s/e/l(mm)	48/100/800(1060)	30/100/800(1060)
Width overall forks	b_5 (mm)	745	950
Round clearance, laden,below mast	m_1 (mm)	25	25
Aisle width for pallets 1000x1200 crossways	A_{st} (mm)	1975	1975
Aisle width for pallets 800x1200 lengthways	A_{st} (mm)	1915	1915
Turning radius	W_0 (mm)	1200	1200
Lift speed,laden/unladen	mm/time	25	25
Lowering speed,laden/unladen	mm/s	Manual control	Manual control
Service weight	kg	223	294